



EMC Test Report

For

JIB-Germany Technology GmbH

Test Standards: EN 55032 :2015/A1:2020
EN 55035 :2017/A11:2020
EN IEC 61000-3-2 :2019/A1:2021
EN 61000-3-3 :2013/A2:2021

Product Description: Power cable

Tested Model: BB-107

Adding Models: RB-107, BB-007, BEB-2116, BEB-2125,
BAS-2204, GEB-2316


Report No.: EBSZ241225655E

Tested Date: 2024-Dec-31

Issued Date: 2025-Jan-10

Tested By: *Ana He*

Ana He

Approved By: 

Jerry Liu

Guangdong Eurber Testing Co., Ltd.
Room 401/402, Building A, Tangxi Zhigu, No.21, Xijing Road, Gushu,
Xixiang Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Note: The test results in this report apply exclusively to the tested model / sample. Without written approval of Guangdong Eurber Testing Co., Ltd., the test report shall not be reproduced except in full.

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	2025-Jan-10	Valid	Original Report

TABLE OF CONTENTS

1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
1.2 EUT SETUP AND OPERATION MODE	5
1.3 MEASUREMENT UNCERTAINTY	6
1.4 TEST FACILITY	6
1.5 TEST EQUIPMENT LIST AND DETAILS	7
1.6 PERFORMANCE CRITERIA FOR EMS	8
2. SUMMARY OF TEST RESULTS	9
3. CONDUCTED EMISSIONS	10
3.1. CONDUCTED EMISSION LIMIT	10
3.2 BLOCK DIAGRAM OF TEST SETUP	10
3.3. TEST PROCEDURE	11
3.4 RESULT LEVEL & OVER LIMIT CALCULATION	11
3.5 ENVIRONMENTAL CONDITIONS	11
4. RADIATED EMISSIONS	14
4.1. RADIATED EMISSION LIMIT	14
4.2. BLOCK DIAGRAM OF TEST SETUP	14
4.3 TEST PROCEDURE	15
4.4 RESULT LEVEL & OVER LIMIT CALCULATION	15
4.5 ENVIRONMENTAL CONDITIONS	16
4.6 TEST DATA AND RESULT	16
5. HARMONIC CURRENT EMISSIONS	18
6. VOLTAGE FLUCTUATIONS AND FLICKER	19
6.1. LIMITS	19
6.2. BLOCK DIAGRAM OF TEST SETUP	19
6.3 ENVIRONMENTAL CONDITIONS	19
6.4 TEST DATA AND RESULT	20
7. ELECTROSTATIC DISCHARGE	21
7.1 ESD IMMUNITY REQUIREMENTS	21
7.2 BLOCK DIAGRAM OF TEST SETUP	21
7.3 TEST PROCEDURE	21
7.4 ENVIRONMENTAL CONDITIONS	22
7.5 TEST DATA AND RESULT	22
8. RADIO FREQUENCY ELECTROMAGNETIC FIELD	23
8.1 RS IMMUNITY REQUIREMENTS	23
8.2 BLOCK DIAGRAM OF TEST SETUP	23
8.3 TEST PROCEDURE	23
8.4 ENVIRONMENTAL CONDITIONS	24
8.5 TEST DATA AND RESULT	24
9. ELECTRICAL FAST TRANSIENTS	25
9.1 EFT IMMUNITY REQUIREMENTS	25
9.2 BLOCK DIAGRAM OF TEST SETUP	25
9.3 TEST PROCEDURE	25
9.4 ENVIRONMENTAL CONDITIONS	26
9.5 TEST DATA AND RESULT	26
10. SURGES	27
10.1 SURGES IMMUNITY REQUIREMENTS	27
10.2 BLOCK DIAGRAM OF TEST SETUP	27
10.3 TEST PROCEDURE	27
10.4 ENVIRONMENTAL CONDITIONS	28
10.5 TEST DATA AND RESULT	28
11. RADIO-FREQUENCY CONTINUOUS CONDUCTED	29
11.1 CS IMMUNITY REQUIREMENTS	29
11.2 BLOCK DIAGRAM OF TEST SETUP	29

11.3 TEST PROCEDURE	29
11.4 ENVIRONMENTAL CONDITIONS	30
11.5 TEST DATA AND RESULT	30
12. VOLTAGE DIPS AND INTERRUPTIONS TEST RESULT	31
12.1 DIPS IMMUNITY REQUIREMENTS	31
12.2 BLOCK DIAGRAM OF TEST SETUP	31
12.3 TEST PROCEDURE	31
12.4 ENVIRONMENTAL CONDITIONS	31
12.5 TEST DATA AND RESULT	32
EXHIBIT- PHOTOGRAPHS OF EUT	33

1. GENERAL INFORMATION


1.1 Product Description for Equipment Under Test (EUT)

Client Information	
Applicant:	JIB-Germany Technology GmbH
Address of applicant:	Am Großen Rohrpfuhl 25, 12355 Berlin-Germany
Manufacturer:	JIB-Germany Technology GmbH
Address of manufacturer:	Am Lückefeld 83, 15831 Blankenfelde-Mahlow Germany

General Description of EUT	
Product Name:	Power cable
Trade Name:	JIB/Boaacoustic
Model No.:	BB-107
Adding Model(s):	RB-107, BB-007, BEB-2116, BEB-2125, BAS-2204, GEB-2316
Difference description:	All models have the same circuit schematics, but the model names and appearance are different. All tests are carried out on BB-107.
Rated Voltage:	600V, 8000W
Test Voltage:	AC230V/50Hz

1.2 EUT Setup and Operation Mode

Block Configuration Diagram for Conducted Emissions

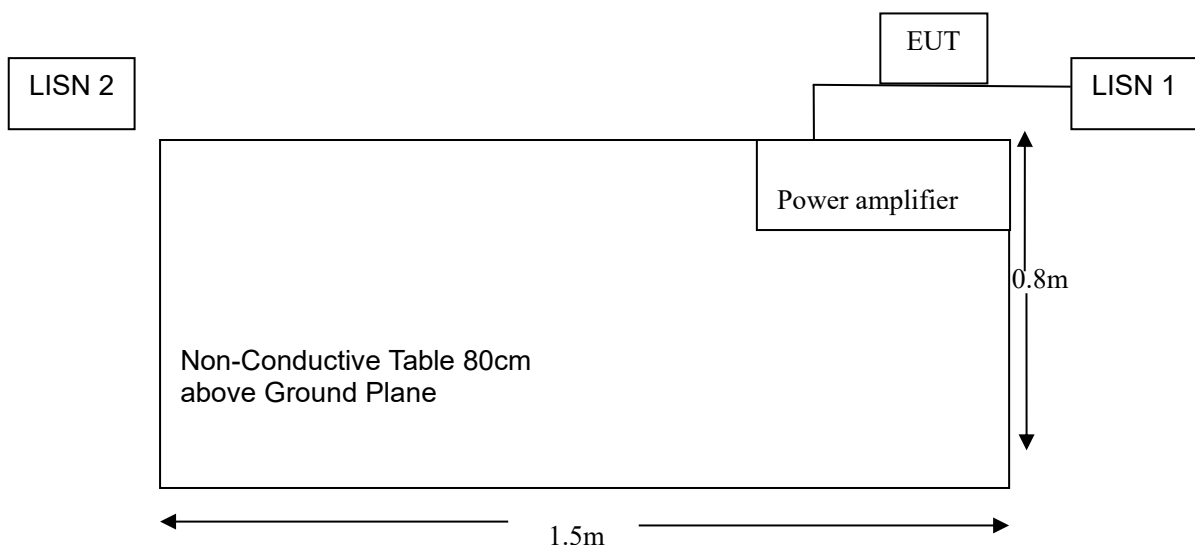

Test Mode List		
Test Mode	Description	Remark
1	Working	For all test

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Power amplifier	N/A	N/A	N/A

1.3 Measurement Uncertainty

Measurement uncertainty			
Parameter	Frequency	Polarity	Measurement uncertainty
Conducted Emission	150kHz~30MHz	----	2.42dB
Radiated Emission	30MHz-200MHz	Horizontal	3.70dB
Radiated Emission	30MHz-200MHz	Vertical	3.84dB
Radiated Emission	200MHz-1000MHz	Horizontal	4.05dB
Radiated Emission	200MHz-1000MHz	Vertical	5.28dB
Radiated Emission	1000MHz-6000MHz	----	4.89dB

1.4 Test Facility

Site:	Guangdong Eurber Testing Co., Ltd.
Location:	Room 401/402, Building A, Tangxi Zhigu, No.21, Xijing Road, Gushu, Xixiang Subdistrict, Bao'an District, Shenzhen, Guangdong, China
Telephone:	+86-755-23284856
Fax:	+86-755-23284856

1.5 Test Equipment List and Details

Test Equipment for Conducted Emission					
Description	Manufacturer	Model	Serial Number	Cal Date	Due Date
LISN	R&S	ENV216	102125	2024/6/22	2025/6/21
LISN	R&S	ENV432	101327	2024/6/22	2025/6/21
EMI Test Receiver	R&S	ESR3	102143	2024/6/22	2025/6/21
EMI Test Software	Audix	E3	N/A	N/A	N/A
Test Equipment for Radiated Emission					
Description	Manufacturer	Model	Serial Number	Cal Date	Due Date
EMI Test Receiver	R&S	ESR-3	102144	2024/6/22	2025/6/21
Amplifier	Sonoma	310	363917	2024/6/22	2025/6/21
Broadband Antenna	Schwarz beck	VULB9168	9168-757	2023/3/03	2026/3/02
EMI Test Software	Audix	E3	N/A	N/A	N/A
Test Equipment for ESD					
Description	Manufacturer	Model	Serial Number	Cal Date	Due Date
ESD Generator	Teseq	NSG 437	1121	2024/6/22	2025/6/21
Test Equipment for EFT/SURGE/DIPS					
Description	Manufacturer	Model	Serial Number	Cal Date	Due Date
Surge Generator	Teseq	NSG 3060-MF	4040	2024/6/22	2025/6/21
CDN	Teseq	CDN 3061-S16	3003	2024/6/22	2025/6/21
EFT/DIPS Generator	Teseq	NSG 3040-MF	6033	2024/6/22	2025/6/21
Transformer	Teseq	INA6501	1002	2024/6/22	2025/6/21
Test Equipment for CS					
Description	Manufacturer	Model	Serial Number	Cal Date	Due Date
CS Generator	Teseq	NSG 4070B-80	45341	2024/6/22	2025/6/21
6dB Attenuator	Teseq	ATN 6075	32154	2024/6/22	2025/6/21
CDN	Teseq	CDN M016	45065	2024/6/22	2025/6/21
Test Equipment for RS					
Description	Manufacturer	Model	Serial Number	Cal Date	Due Date
Signal generator	R&S	SMB100A	113825	2024/6/22	2025/6/21
Power Meter	R&S	NRP2	105581	2024/6/22	2025/6/21
Power Sensor	R&S	NRP-Z91	103778	2024/6/22	2025/6/21
Power Sensor	R&S	NRP-Z91	103779	2024/6/22	2025/6/21
Power Amplifier	R&S	BBA150	102377	2024/6/22	2025/6/21
Antenna	R&S	HL046E	100230	N/A	N/A
RS Test Software	Fala	EZ-RS	N/A	N/A	N/A

1.6 Performance Criteria for EMS

According Clause 8 of EN 55035,

- General

General performance criteria are defined in the following. These criteria shall be used during the testing of primary functions where no relevant annex is applicable.

When assessing the impact of a disturbance on a function, the assessment should take into consideration the impact of a disturbance on a function, the assessment should take into consideration the function's performance prior to the application of the disturbance and only identify as failures those changes in performance that are a result of the disturbance.

- Performance criterion A

The equipment shall continue to operate as intended without operator intervention. No degradation of performance, loss of function or change of operation state is allowed below a performance level specified by the manufacturer when the equipment is use as intended.

The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

- Performance criterion B

During the application of the disturbance, degradation of performance is allowed. However, no unintended change of actual operating state or stored data is allowed to persist after the test.

After the test, the equipment shall continue to operate as intended without operator intervention; no degradation of performance or loss of function is allowed, below a performance level specified by the manufacturer, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance.

If the minimum performance level (or the permissible performance loss), or recovery time, is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

- Performance criterion C

Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions. A reboot or re-start operation is allowed.

Information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

2. SUMMARY OF TEST RESULTS

EN 55032:2015/A1:2020 Emissions		
Test Standards	Description of Test Item	Result
EN 55032:2015	Conducted Emissions	Compliance
EN 55032:2015	Radiated Emissions	Compliance

EN 55035:2017/A11:2020 Immunity		
Test Standards	Description of Test Item	Result
IEC 61000-4-2	Electrostatic Discharge	Compliance
IEC 61000-4-3	Continuous radiated disturbances	Compliance
IEC 61000-4-4	Electrical Fast Transients	Compliance
IEC 61000-4-5	Surges	Compliance
IEC 61000-4-6	Continuous conducted disturbances	Compliance
IEC 61000-4-8	Power Frequency Magnetic Field	N/A
IEC 61000-4-11	Voltage Dips and Interruptions	Compliance

EN IEC 61000-3-2 :2019/A1:2021		
Rule	Description of Test Item	Result
EN IEC 61000-3-2	Harmonic Current Emissions	Compliance

EN 61000-3-3 :2013/A2:2021		
Rule	Description of Test Item	Result
EN 61000-3-3	Voltage fluctuations & flicker	Compliance

*Note1: N/A means not applicable.

3. Conducted Emissions

3.1. Conducted Emission Limit

Requirements for conducted emissions from the AC mains power ports of Class B equipment

Frequency Range (MHz)	Coupling device	Detector type/bandwidth	Class B limits dB(μV)
0.15-0.5	AMN	Quasi Peak/9kHz	66~56
0.5-30			60
0.15-0.5	AMN	Average/9kHz	56~46
0.5-30			50


Note The lower limit shall apply at the transition frequencies.

Requirements for asymmetric mode conducted emissions from Class B equipment

Frequency Range (MHz)	Coupling Device	Detector Type/ bandwidth	Class B voltage limits dB(μV)
0.15~0.5	AAN	Quasi Peak / 9 kHz	84~74
0.5~30			74
0.15~0.5	AAN	Average / 9 kHz	74~64
0.5~30			64

Note1 The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.
 Note2 The lower limit shall apply at the transition frequencies.

3.2 Block Diagram of Test Setup

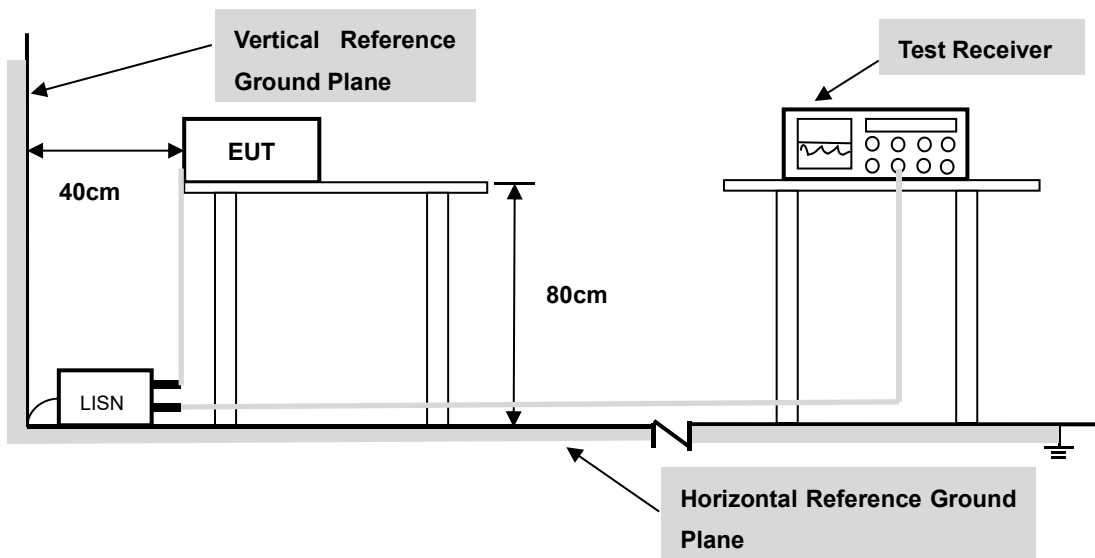

3.3. Test Procedure

During the conducted emissions test, the adapter was connected to the main outlet of the first LISN and the other support equipments were connected to the outlet of the second LISN.

Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance using all installation combination.

All data was recorded in the Quasi-peak and average detection mode.

3.4 Result Level & Over Limit Calculation

The Result Level is calculated by Reading Level adding the LISN Factor and the Cable Factor, The basic equation is as follows:

$$\text{Result Level} = \text{Reading Level} + \text{LISN Factor} + \text{Cable Factor}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a “Over Limit” of -6dB means the emission is 6dB below the maximum limit for Class B device. The equation for “Over Limit” calculation is as follows:


$$\text{Over Limit} = \text{Result Level} - \text{Limit}$$

3.5 Environmental Conditions

Temperature:	20.8° C
Relative Humidity:	55.5%RH
Atmospheric Pressure:	101.4kPa
Test Date:	2024-Dec-31
Tested By:	Ana He


3.6 Test Data and Result

LINE

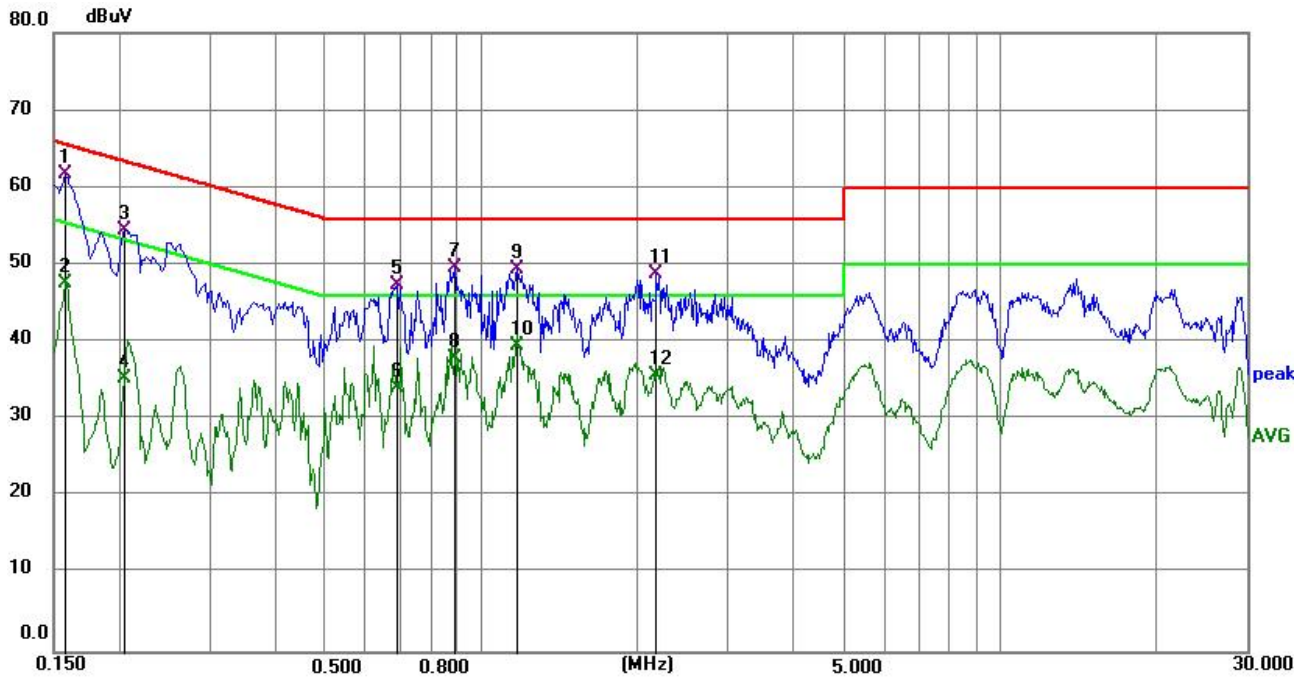

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1589	51.07	10.64	61.71	65.52	3.81	QP
2	0.1589	36.98	10.64	47.62	55.52	7.90	AVG
3	0.2050	43.96	10.64	54.60	63.41	8.81	QP
4	0.2050	24.76	10.64	35.40	53.41	18.01	AVG
5	0.6900	36.79	10.75	47.54	56.00	8.46	QP
6	0.6900	23.45	10.75	34.20	46.00	11.80	AVG
7	0.8924	38.82	10.82	49.64	56.00	6.36	QP
8	0.8924	27.16	10.82	37.98	46.00	8.02	AVG
9	1.1803	38.60	10.90	49.50	56.00	6.50	QP
10	1.1803	28.70	10.90	39.60	46.00	6.40	AVG
11	2.1792	37.76	11.07	48.83	56.00	7.17	QP
12	2.1792	24.63	11.07	35.70	46.00	10.30	AVG

NEUTRAL

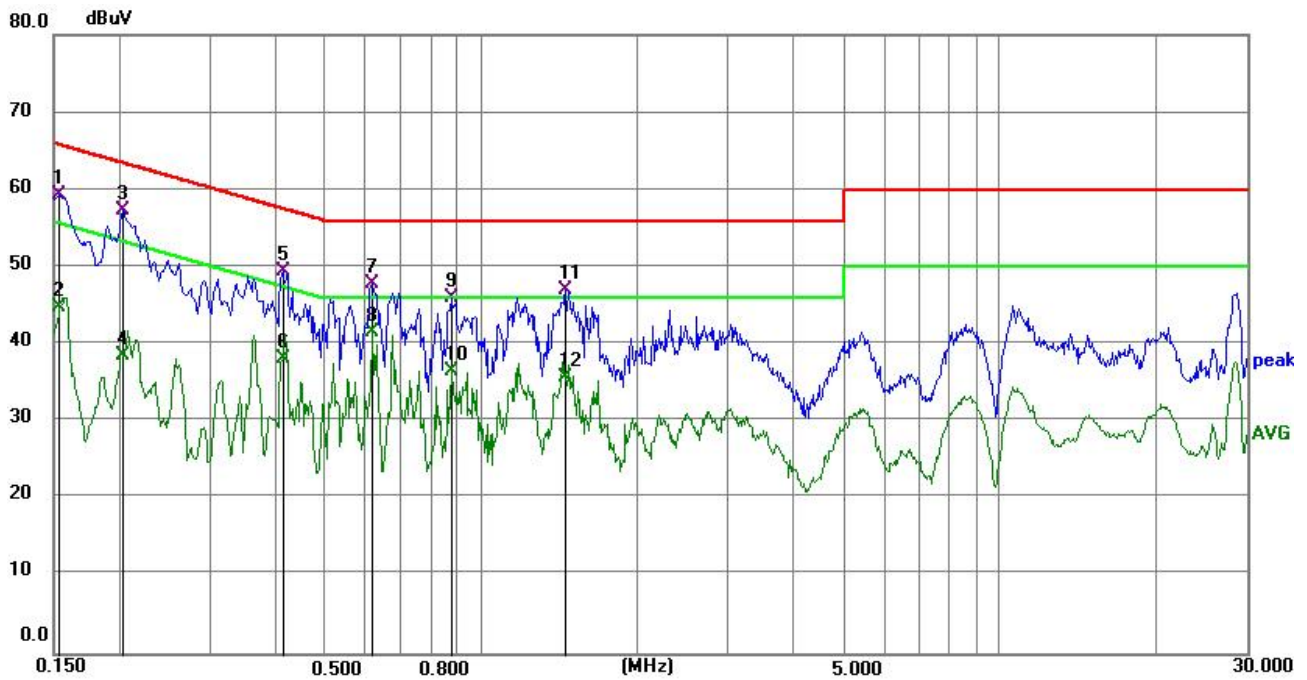

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1544	48.74	10.54	59.28	65.76	6.48	QP
2	0.1544	34.37	10.54	44.91	55.76	10.85	AVG
3	0.2039	46.89	10.54	57.43	63.45	6.02	QP
4	0.2039	28.06	10.54	38.60	53.45	14.85	AVG
5	0.4154	38.79	10.62	49.41	57.54	8.13	QP
6	0.4154	27.48	10.62	38.10	47.54	9.44	AVG
7	0.6179	37.19	10.65	47.84	56.00	8.16	QP
8	0.6179	30.98	10.65	41.63	46.00	4.37	AVG
9	0.8789	35.31	10.72	46.03	56.00	9.97	QP
10	0.8789	25.80	10.72	36.52	46.00	9.48	AVG
11	1.4638	36.17	10.81	46.98	56.00	9.02	QP
12	1.4638	25.01	10.81	35.82	46.00	10.18	AVG

Note: 1. Result Level = Reading Level + LISN/ISN Factor + Cable loss

4. Radiated Emissions

4.1. Radiated Emission Limit

Requirements for radiated emissions at frequencies up to 1GHz for Class B equipment


Frequency range (MHz)	Measurement		Class B limits dB(μ V/m)
	Distance (m)	Detector type/bandwidth	
30 ~ 230	3	Quasi Peak/120kHz	40
230 ~ 1000			47

Requirements for radiated emissions at frequencies above 1GHz for Class B equipment


Frequency range (MHz)	Measurement		Class B limits dB(μ V/m)
	Distance (m)	Detector type/bandwidth	
1000 ~ 3000	3	Average/1MHz	50
3000 ~ 6000			54
1000 ~ 3000	3	Peak/1MHz	70
3000 ~ 6000			74

4.2. Block Diagram of Test Setup

Radiated Emissions Frequency: 30MHz to 1000MHz:

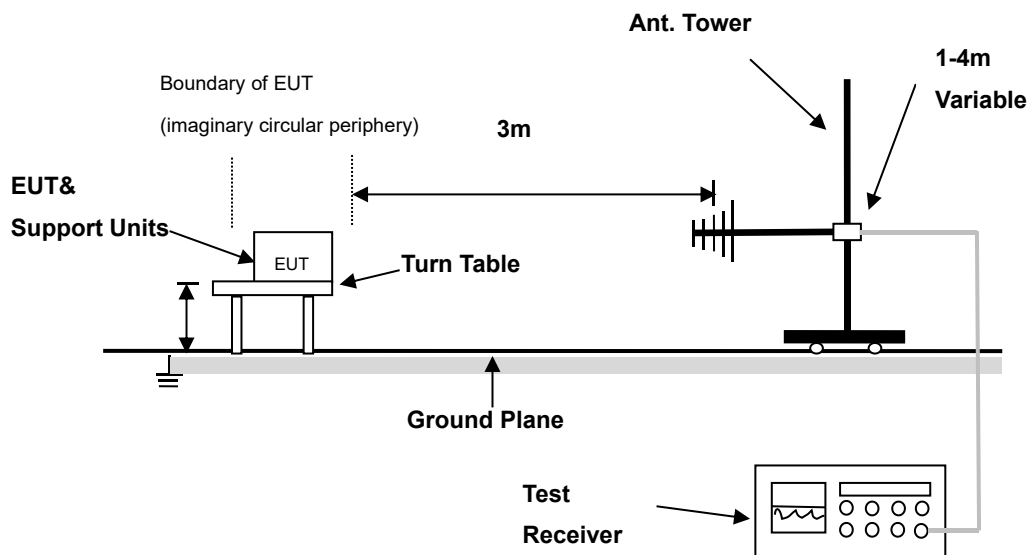

Radiated Emissions Frequency: 1000MHz to 6000MHz:

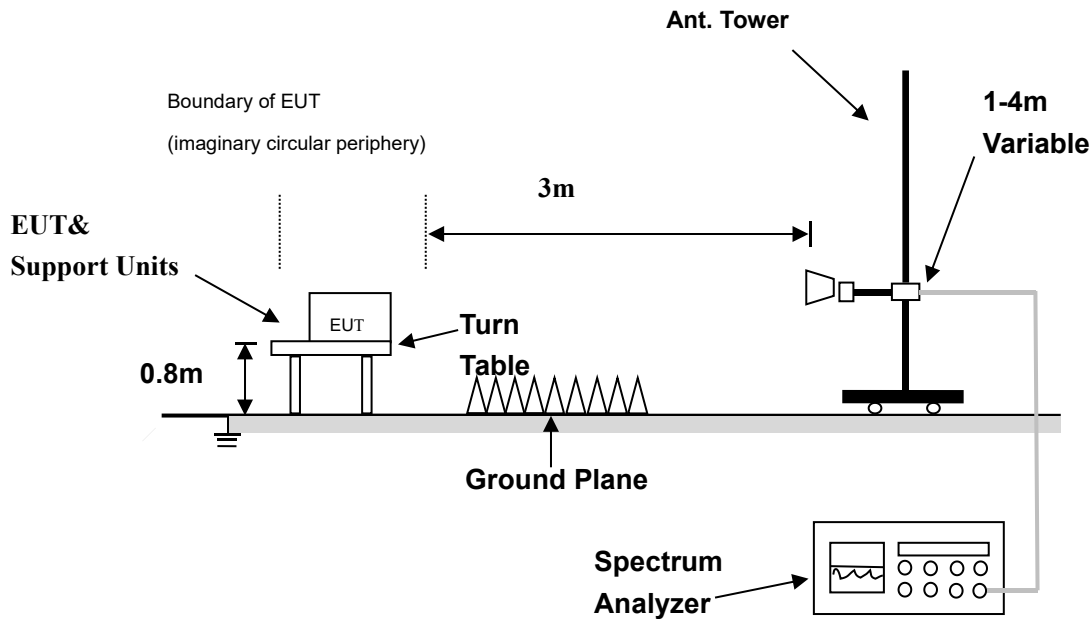

4.3 Test Procedure

- (1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual.
- (2) Support equipment, if needed, was placed as per EN 55032. All I/O cables were positioned to simulate typical actual usage as per EN 55032.
- (3) The EUT is placed on a turntable, which is 0.8 meter high above the ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna, which is mounted on an antenna tower. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.
- (4) Recorded at least the six highest emissions.

4.4 Result Level & Over Limit Calculation

The Result Level is calculated by Reading Level adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Result Level} = \text{Reading Level} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Over Limit" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB means the emission is 6dB below the maximum limit for Class B device. The equation for margin calculation is as follows:


$$\text{Over Limit} = \text{Result Level} - \text{Limit}$$

4.5 Environmental Conditions

Temperature:	26.1°C
Relative Humidity:	54.3%RH
Atmospheric Pressure:	102.2kPa
Test Date:	2024-Dec-31
Tested By:	Ana He

4.6 Test Data and Result

Horizontal:

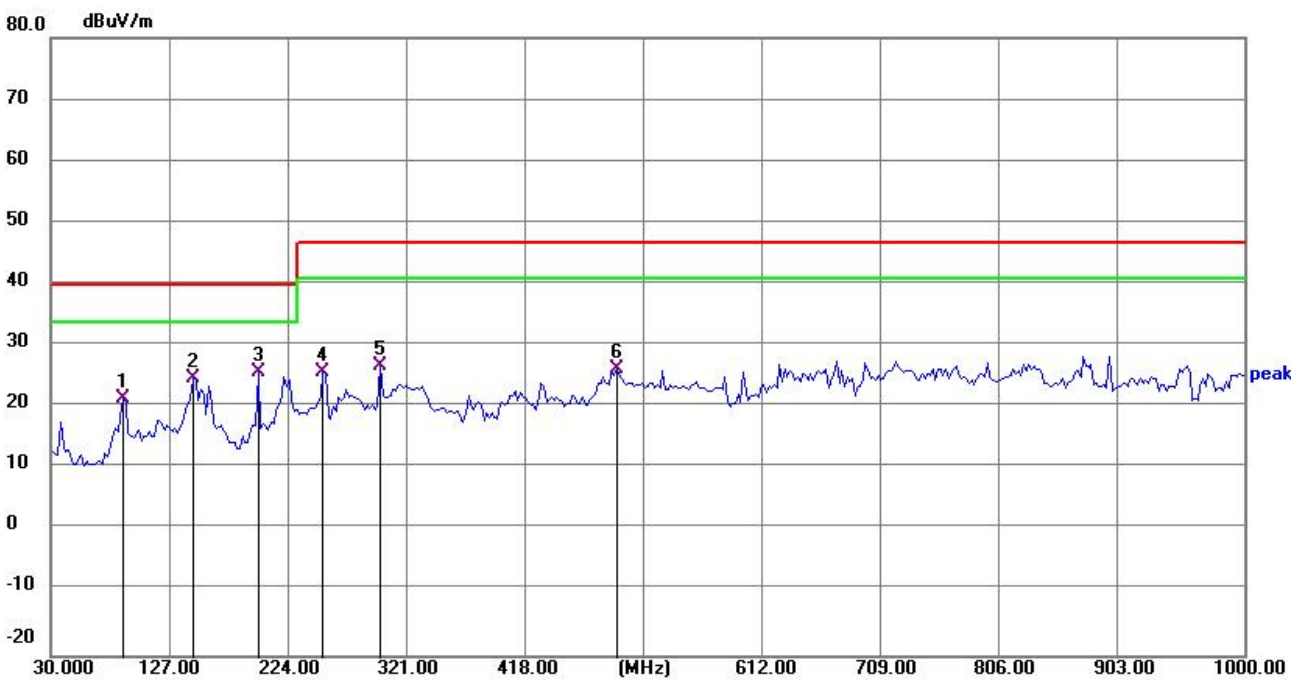

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	89.0434	42.24	-20.45	21.79	40.00	18.21	QP
2	145.9781	43.21	-18.20	25.01	40.00	14.99	QP
3	198.6956	46.96	-20.97	25.99	40.00	14.01	QP
4	251.4130	45.27	-19.42	25.85	47.00	21.15	QP
5	297.8043	44.95	-17.97	26.98	47.00	20.02	QP
6	489.6956	38.49	-11.96	26.53	47.00	20.47	QP

Vertical:



No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.0000	49.12	-16.93	32.19	40.00	7.81	QP
2	74.2826	53.40	-22.79	30.61	40.00	9.39	QP
3	148.0869	47.80	-16.48	31.32	40.00	8.68	QP
4	198.6956	47.51	-18.12	29.39	40.00	10.61	QP
5	253.5217	43.73	-14.61	29.12	47.00	17.88	QP
6	430.6521	45.31	-13.81	31.50	47.00	15.50	QP

Note: 1. Level = Reading Level +Antenna Factor + Cable loss – Preamp factor

5. Harmonic current emissions

According to EN 61000-3-2:2013/A2:2021 section 7: Equipment with a rated power of 75W or less, other than discharging lighting equipment, limits are not included in this standard.


6. Voltage fluctuations and flicker

6.1. Limits

The following limits apply:

- the value of Pst shall not be greater than 1,0;
- the value of Plt shall not be greater than 0,65;
- Tmax, the accumulated time value of d(t) with a deviation exceeding 3,3% during a single voltage change at the EUT terminals, shall not exceed 500ms;
- the maximum relative steady-state voltage change, dc, shall not exceed 3,3%;
- the maximum relative voltage change dmax, shall not exceed:
 - a) 4% without additional conditions;
 - b) 6% for equipment which is:
 - switched manually, or
 - switched automatically more frequently than twice per day, and also has either a delayed restart(the delay being not less than a few tens of seconds), or manual restart, after a power supply interruption.
 - c) 7% for equipment which is:
 - attended whilst in use (for example: hair dryers, vacuum cleaners, kitchen equipment such as mixers, garden equipment such as lawn mowers, portable tools such as electric drills), or
 - switched on automatically, or is intended to be switched on manually, no more than twice per day, and also has either a delayed restart(the delay being not less than a few tens of seconds) or manual restart after a power supply interruption.

6.2. Block Diagram of Test Setup

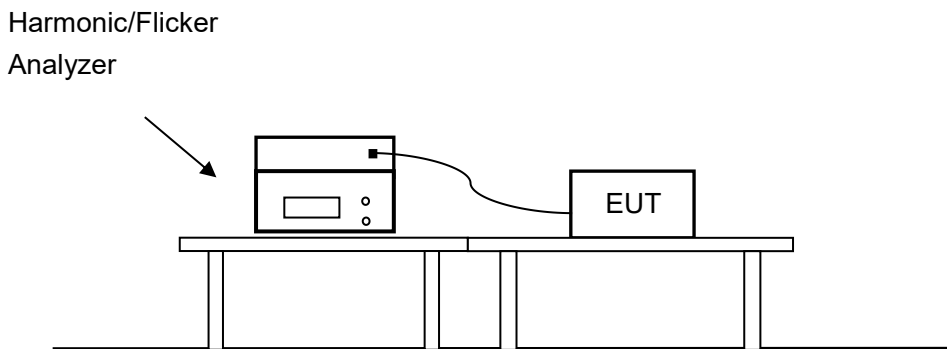

6.3 Environmental Conditions

Temperature:	23.3°C
Relative Humidity:	55.4%RH
Atmospheric Pressure:	100.6kPa
Test Date:	2024-Dec-31
Tested By:	Ana He

6.4 Test Data and Result

Flicker Test Summary per EN/IEC61000-3-3 Ed. 3.0 (2013) (Run time)

Test Result: Pass


Status: Test Completed

Pst_i and limit line

European Limits



Plt and limit line

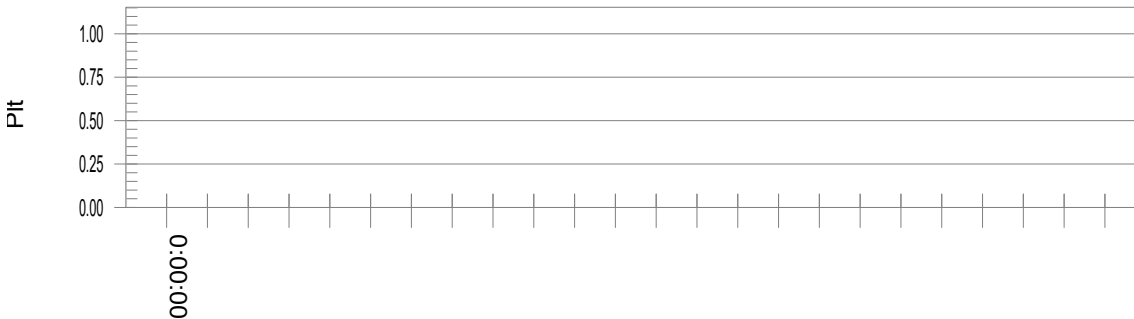

Parameter values recorded during the test:


Vrms at the end of test (Volt):	230.09			
Highest dt (%):	0.00	Test limit (%):	N/A	N/A
T-max (mS):	0	Test limit (mS):	500.0	Pass
Highest dc (%):	0.00	Test limit (%):	3.30	Pass
Highest dmax (%):	0.00	Test limit (%):	4.00	Pass
Highest Pst (10 min. period):	0.064	Test limit:	1.000	Pass
Highest Plt (2 hr. period):	0.028	Test limit:	0.650	Pass

7. Electrostatic Discharge

7.1 ESD Immunity Requirements

Environmental Phenomenon	Port	Test Specification	Basic Standard	Performance criterion
Electrostatic discharge	Enclosure port	4kV(Contact Discharge)	IEC 61000-4-2	B
		8kV(Air Discharge)	IEC 61000-4-2	B

7.2 Block Diagram of Test Setup

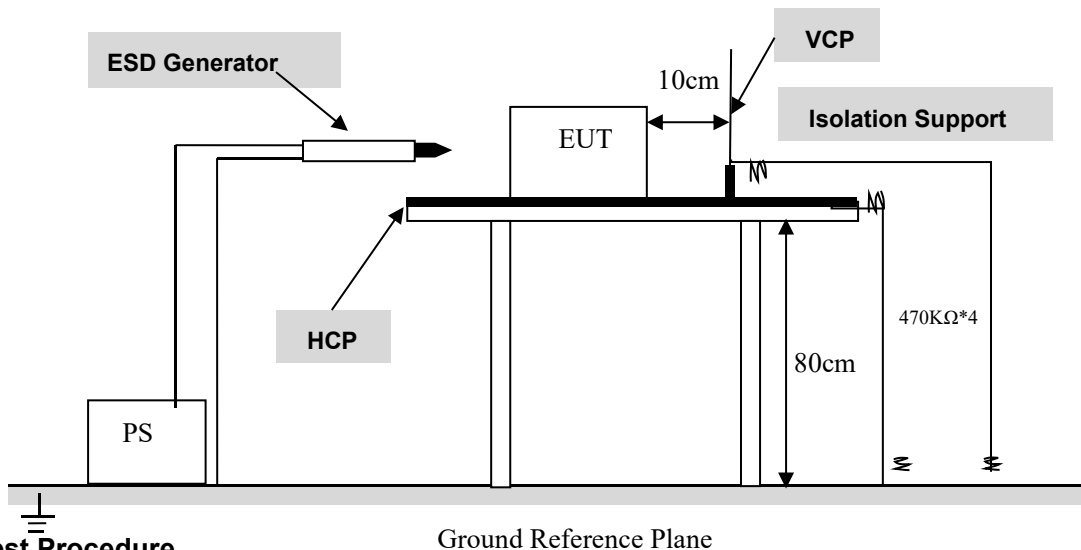

7.3 Test Procedure

Air Discharges:

This test is done on a non-conductive surface. The round Discharges tip of the Discharges electrode shall be approached as fast as possible to touch the EUT. After each Discharge, the Discharges electrode shall be removed from the EUT. The generator is then re-triggered for a new single Discharge and repeated 10 times for each pre-selected test point. This procedure shall be repeated until all the air Discharges completed.

Contact Discharges:

All the procedure shall be same as Section 8.3.2 of IEC 61000-4-2, except that the tip of the Discharges electrode shall touch the EUT before the Discharges switch is operated.

Indirect Discharges for HCP

At least 20 single Discharges shall be applied to the horizontal coupling plane, at points on each side of the EUT. The Discharges electrode positions vertically at a distance of 0.1 m from the EUT and with the Discharges electrode touching the coupling plane.

Indirect Discharges for VCP

At least 20 single Discharges shall be applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5m X 0.5m, is placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges shall be applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated

7.4 Environmental Conditions

Temperature:	20.6° C
Relative Humidity:	52%
Atmospheric Pressure:	101.8kPa
Test Date:	2024-Dec-31
Tested By:	Ana He

7.5 Test Data and Result

EN 61000-4-2 Test Points	Test Levels (kV)							
	-2	+2	-4	+4	-8	+8	-15	+15
Air Discharge								
Slot	A	A	A	A	A	A	/	/
Surface	A	A	A	A	A	A	/	/

EN 61000-4-2 Test Points	Test Levels (kV)							
	-2	+2	-4	+4	-6	+6	-8	+8
Contact Discharge								
Screw								


EN 61000-4-2 Test Points	Test Levels (kV)							
	Indirect Contact Discharge (HCP)				Indirect Contact Discharge (VCP)			
	-2	+2	-4	+4	-2	+2	-4	+4
Front Side	A	A	A	A	A	A	A	A
Back Side	A	A	A	A	A	A	A	A
Left Side	A	A	A	A	A	A	A	A
Right Side	A	A	A	A	A	A	A	A

8. Radio Frequency Electromagnetic Field

8.1 RS Immunity Requirements

Environmental Phenomenon	Port	Test Specification	Basic Standard	Performance criterion
Radio-frequency electromagnetic field Amplitude modulated	Enclosure port	80-1000MHz, 1800MHz, 2600MHz, 3500MHz, 5000MHz 3V/m (unmodulated, r.m.s) 80% AM (1kHz)	IEC 61000-4-3	A

8.2 Block Diagram of Test Setup

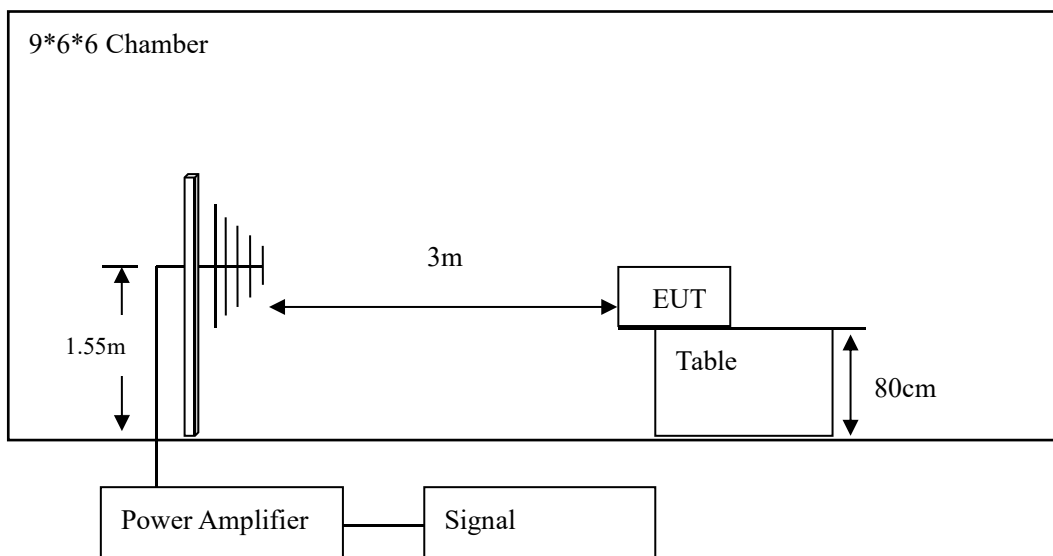

8.3 Test Procedure

Test is conducting under the description of IEC61000-4-3.

- (1) The EUT was switched on and allowed to warm up to its normal operating condition.
- (2) The EUT was exercised and monitored in the manner specified by the customer.

(3) All test instruments were PC controlled, via their IEEE 488.2 bus interfaces, and the test conducted in the following manner:

The testing frequencies were swept over the required frequency range, with a step frequency equal to 1% of fundamental. The sweep rate was 1.0×10^{-3} decades/s. For each frequency tested, the signal generator output level was adjusted automatically until the unmodulated field strength registered by the field monitor reached the desired level. This level was held constant for the specified dwell time.

(4) The EUT was continuously monitored during the test in accordance with the Pass / Fail criteria declared by the customer.

(5) The test was done in both horizontal and vertical antenna polarizations, and for all necessary sides of the EUT.

8.4 Environmental Conditions

Temperature:	20.8° C
Relative Humidity:	52.4%RH
Atmospheric Pressure:	101.8kPa
Test Date:	2024-Dec-31
Tested By:	Ana He

8.5 Test Data and Result

Field Strength: 3V/m

Frequency step: 1% of fundamental

Dwell time: 1 second

Modulation: AM by 1kHz sine wave with 80% modulation depth


Frequency Range(MHz)	Field (V/m)	Front		Rear		Left Side		Right Side	
		VERT	HORI	VERT	HORI	VERT	HORI	VERT	HORI
80-1000	3	A	A	A	A	A	A	A	A
1800,2600, 3500,5000	3	A	A	A	A	A	A	A	A

9. Electrical fast transients

9.1 EFT Immunity Requirements

Environmental Phenomenon	Port	Test Specification	Basic Standard	Performance criterion
Electrical fast transients	Input a.c. power. ports	1kV(peak) Tr/Th:5/50ns Repetition frequency:5kHz	IEC 61000-4-4	B
	Analogue/digital data ports	0.5kV(peak) Tr/Th:5/50ns Repetition frequency:5kHz		B

9.2 Block Diagram of Test Setup

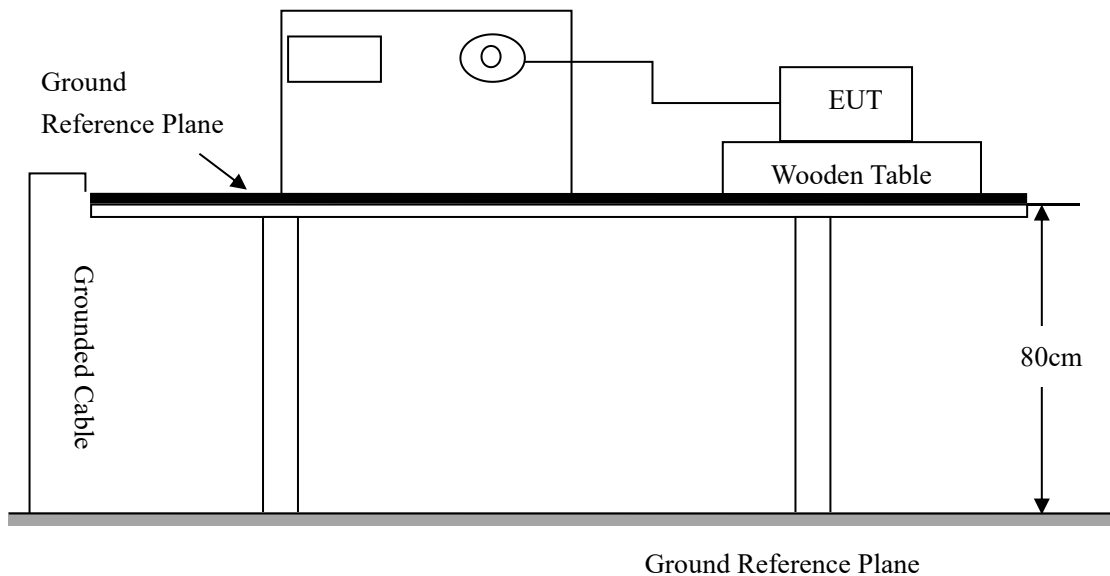

9.3 Test Procedure

(1) The EUT was switched on and allowed to warm up to its normal operating condition.

(2) D.C./A.C. Power Line Test

The EFT/B test system has a built-in coupling/decoupling network which couples the generated EFT bursts into the EUT power supply lines connected to it. The EFT bursts were coupled to the selected lines (one at a time) of the EUT.

(3) I/O Signal & Control Line Test

The interference impulses were capacitively coupled to the EUT's signal cables.

(4) The EUT was monitored during the test in accordance with the Pass /Fail criteria declared by the customer.

(5) The test was performed with EFT bursts in the positive and negative polarities and repeated on all necessary lines.

9.4 Environmental Conditions

Temperature:	22° C
Relative Humidity:	55.6%RH
Atmospheric Pressure:	101.8kPa
Test Date:	2024-Dec-31
Tested By:	Ana He

9.5 Test Data and Result


IEC61000-4-4		Test Levels(kV)					
Test Points		+0.5	-0.5	+1.0	-1.0	+2.0	-2.0
AC mains power input port	L	A	A	A	A	/	/
	N	A	A	A	A	/	/
	L+N	A	A	A	A	/	/
	PE	A	A	A	A	/	/
	L+PE	A	A	A	A	/	/
	N+PE	A	A	A	A	/	/
	L+N+PE	A	A	A	A	/	/
Single Port	RJ45	/	/	/	/	/	/

10. Surges

10.1 Surges Immunity Requirements

Environmental Phenomenon	Port	Test Specification	Basic Standard	Performance criterion
Surges	Input a.c. power ports	Tr/Th:1,2/50 μ s 1kV (line to line) 2kV(line to earth)	IEC 61000-4-5	B
	Analogue/digital data ports	Tr/Th:10/700 μ s 1kV (line to ground)	IEC 61000-4-5	C

10.2 Block Diagram of Test Setup

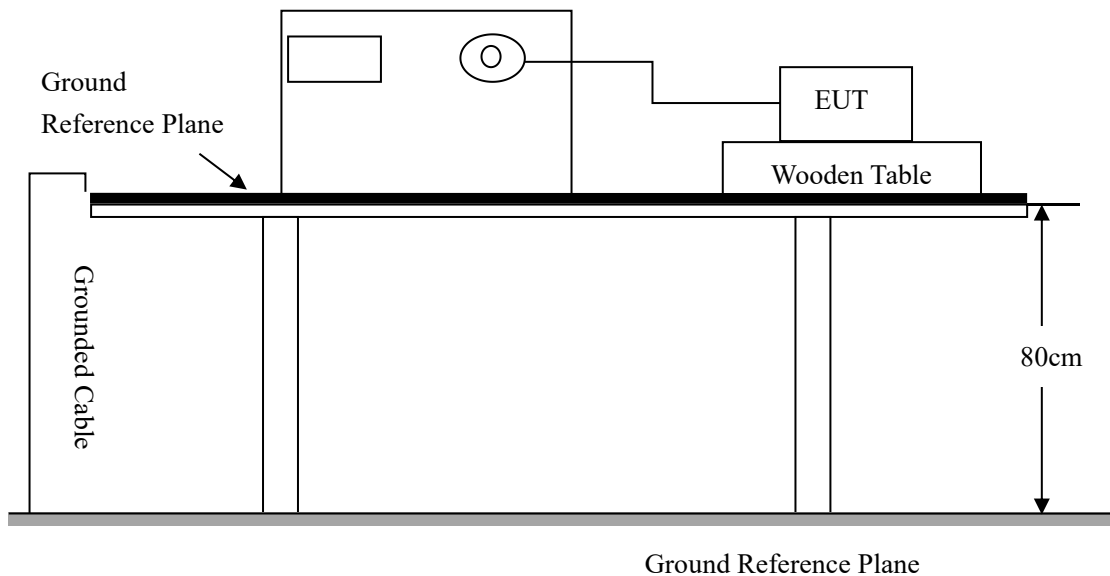

10.3 Test Procedure

- (1) The power supply to EUT was switched on and allowed to warm up to its normal operating condition.
- (2) The surge generator phase shifter was set to different angle.
- (3) The correct open-circuit test level was set with the surge generator disconnected from the coupling network.
- (4) The output of the generator was then reconnected back to the coupling network.
- (5) Five discharges, generated by the voltage surge generator, were made on each relevant line, for each polarity, at each test level, with the relevant discharge interval.
- (6) The EUT was observed during, and checked after the test to determine the result.

10.4 Environmental Conditions

Temperature:	21.5° C
Relative Humidity:	55%RH
Atmospheric Pressure:	101.8kPa
Test Date:	2024-Dec-31
Tested By:	Ana He

10.5 Test Data and Result


IEC61000-4-5 Test Points		Test Levels(kV)					
		+0.5	-0.5	+1.0	-1.0	+2.0	-2.0
AC mains power input port	L-N	A	A	A	A	/	/
	L-PE	A	A	A	A	A	A
	N-PE	A	A	A	A	A	A
Signal port	RJ45	/	/	/	/	/	/

11. Radio-Frequency Continuous Conducted

11.1 CS Immunity Requirements

Environmental Phenomenon	Port	Test Specification	Basic Standard	Performance criterion
Radio-frequency continuous conducted	Input a.c. power ports	0,15~10MHz,3V 10~30MHz,3~1V 30~80MHz,1V	IEC 61000-4-6	A
	Analogue/digital data ports	0,15~10MHz,3V 10~30MHz,3~1V 30~80MHz,1V	IEC 61000-4-6	A

11.2 Block Diagram of Test Setup

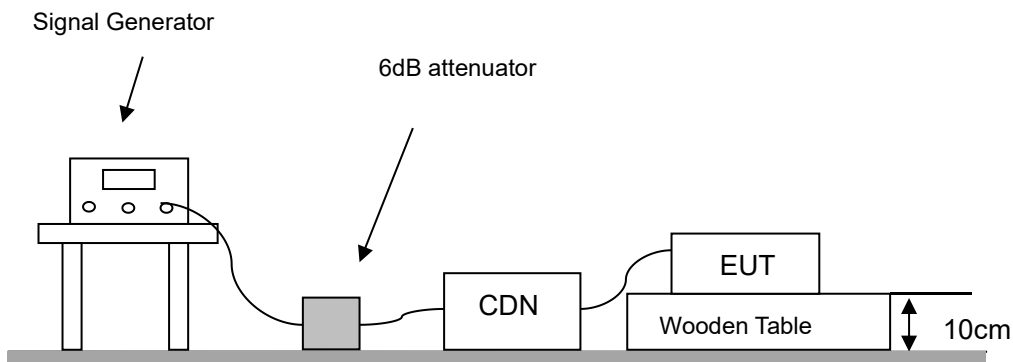

11.3 Test Procedure

(1)The EUT was switched on and allowed to warm up to its normal operating condition.

(2)The EUT are placed on an insulating support 0.1 m high above a ground reference plane. CDN(coupling and decoupling device) is placed on the ground plane about 0.3 m from EUT. Cables between CDN and EUT are as short as possible, and their height above the ground reference plane shall be between 30 and 50 mm (where possible).

(3)The frequency range is swept from 150 kHz to 80 MHz using 3V signal level, and with the disturbance signal 80% amplitude modulated with a 1 kHz sine wave.

(4)The rate of sweep shall not exceed $1.5 \cdot 10^{-3}$ decades/s. Where the frequency is swept incrementally, the step size shall not exceed 1% of the start and thereafter 1% of the preceding frequency value. Recording the EUT operating situation during compliance testing and decide the EUT immunity criterion.

(5)The EUT was continuously monitored during the test in accordance with the PASS/FAIL criteria declared by the customer.

11.4 Environmental Conditions

Temperature:	22.6° C
Relative Humidity:	54.6%RH
Atmospheric Pressure:	101.7kPa
Test Date:	2024-Dec-31
Tested By:	Ana He

11.5 Test Data and Result


IEC 61000-4-6 Test Point	Frequency Range (MHz)	Strength (Vrms)	Modulation	Result
Power Line	0.15~10	3	AM	A
	10~30	3~1		A
	30~80	1		A
RJ45 Port	0.15~10	3	AM	N/A
	10~30	3~1		N/A
	30~80	1		N/A

12. Voltage Dips and Interruptions Test Result

12.1 DIPS Immunity Requirements

Environmental Phenomenon	Port	Test Specification	Basic Standard	Performance criterion
Voltage Dips	Input a.c. power port	>95% reduction 0,5 period	IEC 61000-4-11	B
		30% reduction 25 period		C
Voltage interruptions		>95% reduction 250 period		C

12.2 Block Diagram of Test Setup

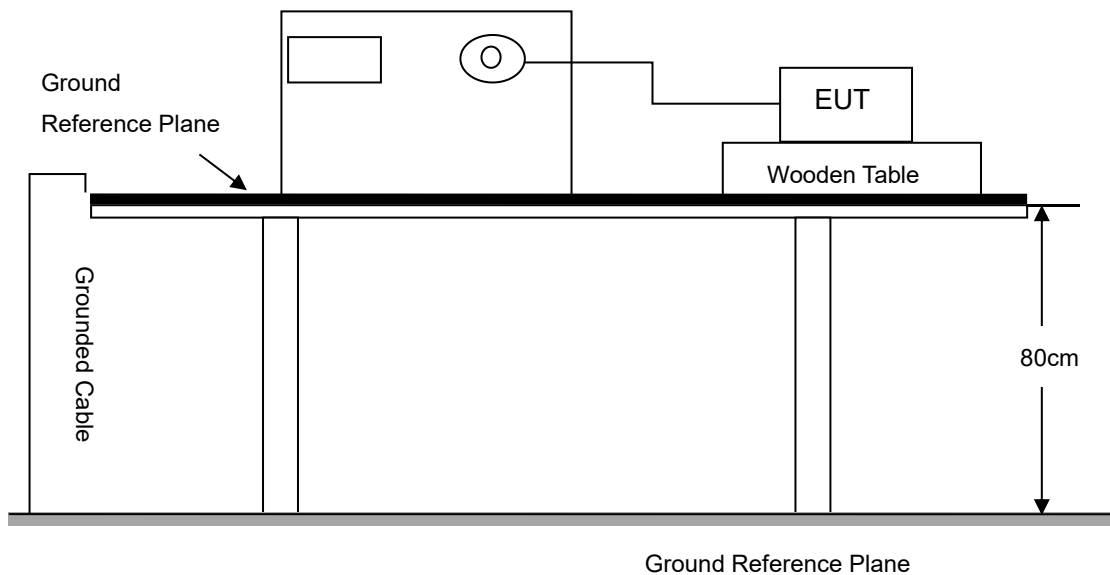

12.3 Test Procedure

- (1)The interruption is introduced at selected phase angles with specified duration.
- (2)Record any degradation of performance.

12.4 Environmental Conditions

Temperature:	22.4° C
Relative Humidity:	52%RH
Atmospheric Pressure:	101.2kPa
Test Date:	2024-Dec-31
Tested By:	Ana He

12.5 Test Data and Result

Environmental Phenomenon	Test Level %U _T	Reduction (%)	Duration (periods)	Result
Voltage Dips	<5	>95	0.5	A
	70	30	25	A
Voltage interruptions	<5	>95	250	B

EXHIBIT- PHOTOGRAPHS OF EUT



******* END OF REPORT *******