


## Blackberry SCHUKO-C15 BB-107-EU

The BB-107 power cable is designed for secure, low-loss power supply in audio and home appliance applications. Three fine-stranded bare copper (BC) conductors with LD-PE insulation and a central PVC jacket are stabilized by paper layers and aluminum foil. A transparent PVC outer layer with dense textile braid adds mechanical protection. The power plug and IEC C15 connector are equipped with gold-plated contacts and aluminum sleeves. The plug is available in versions for different regional standards.

Verpackungseinheit: 1 Stück (Set)

The BB-107 power cable is designed for secure, low-loss power supply in audio and home appliance applications. Three fine-stranded bare copper (BC) conductors with LD-PE insulation and a central PVC jacket are stabilized by paper layers and aluminum foil. A transparent PVC outer layer with dense textile braid adds mechanical protection. The power plug and IEC C15 connector are equipped with gold-plated contacts and aluminum sleeves. The plug is available in versions for different regional standards. Packaging unit: 1 piece (set)

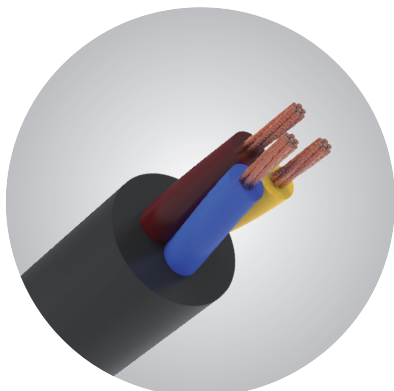

### Technische Spezifikationen:

|                |                                                                                                   |
|----------------|---------------------------------------------------------------------------------------------------|
| Leitermaterial | BC                                                                                                |
| Leiterstruktur | 3 × (128 × Ø 0,20 mm BC) + 1 × (7 × Ø 0,12 mm BC)                                                 |
| Querschnitt    | 3 × 4,0 mm <sup>2</sup> (11 AWG)                                                                  |
| Isolierung     | LD-PE Ø 5,0 mm                                                                                    |
| Schutzschicht  | Papierband und AL-Folie                                                                           |
| Schirmung      | Geflechschirm (24 × 11 × Ø 0,12 mm Aluminium)                                                     |
| Außenmantel    | PVC Ø 15,0 mm, Baumwollgeflecht (schwarz)                                                         |
| Signalqualität | Zuverlässige Stromversorgung für HiFi-/AV-Geräte                                                  |
| Stecker        | Netzstecker (ländertypisch) und IEC-C15, vergoldet, Aluminiumhülse, perlweiß oder silber lackiert |
| Verbindung     | Netzstecker (M, länderspezifisch) auf IEC C15 Kaltgerätebuchse (F), 3-polig (L/N/PE)              |
| Anwendung      | Netzstromversorgung für HiFi-, AV- und Studio-Geräte                                              |

### Technical Specifications:

|                     |                                                                                                      |
|---------------------|------------------------------------------------------------------------------------------------------|
| Conductor Material  | BC                                                                                                   |
| Conductor Structure | 3 × (128 × Ø 0.20 mm BC) + 1 × (7 × Ø 0.12 mm BC)                                                    |
| Cross Section       | 3 × 4.0 mm <sup>2</sup> (11 AWG)                                                                     |
| Insulation          | LD-PE Ø 5.0 mm                                                                                       |
| Protective Layer    | Paper tape and AL foil                                                                               |
| Shielding           | Braid shielding (24 × 11 × Ø 0.12 mm aluminum)                                                       |
| Outer Jacket        | PVC Ø 15.0 mm, cotton braid (black)                                                                  |
| Signal Quality      | Reliable power supply for HiFi/AV devices                                                            |
| Connector           | Power plug (region-specific) and IEC C15, gold-plated, aluminum sleeve, pearl white or silver coated |
| Connection          | Power plug (M, region-specific) to IEC C15 connector (F), 3-pin (L/N/PE)                             |
| Application         | Power supply for HiFi, AV, and studio equipment                                                      |