


Blackberry TRS-RCA2 BB-103

Das Audiokabel BB-103 verbindet portable Geräte mit 3,5-mm-Klinkenausgang zuverlässig mit RCA-Eingängen. Zwei OFC-Signaladern mit FPE- und PE-Isolierung sind doppelt geschirmt durch Aluminiumfolie und Kupfergeflecht. Ein PVC-Mantel mit dichtem Baumwollgeflecht bietet Stabilität und hochwertige Haptik. Die sandgestrahlten 3,5-mm-Klinken- und RCA-Stecker mit Markierringen gewährleisten klare Kanaluordnung. Ideal für rauscharme, verlustarme Stereo-Übertragung in mobilen und stationären Anwendungen.
Verpackungseinheit: 1 Stück (Set)

The BB-103 audio cable reliably connects portable devices with 3.5 mm outputs to RCA inputs. Two OFC signal conductors with FPE and PE insulation are double-shielded by aluminum foil and copper braid. A PVC jacket with dense cotton braid offers mechanical stability and premium feel. Sandblasted 3.5 mm jack and RCA connectors with marking rings ensure clear channel assignment. Ideal for low-noise, low-loss stereo transmission in mobile and stationary use.
Packaging unit: 1 piece (set)

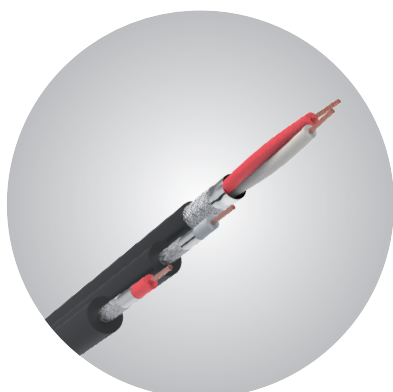

Technische Spezifikationen:

Leitermaterial	OFC
Leiterstruktur	2 × (19 × Ø 0,127mm OFC)
Querschnitt	2 × 0,2405 mm ² (24 AWG)
Isolierung	FPE Ø 3,0 mm + PE Ø 1,8 mm
Schutzschicht	AL-Folie
Schirmung	Geflecht (128 × Ø 0,12 mm TC, verzinkt)
Außenmantel	PVC Ø 6,0 mm, Baumwollgeflecht (schwarz)
Signalqualität	Hochwertige, rauscharme Übertragung
Stecker	3,5 mm Klinke auf 2× RCA, vergoldet, Hülse Metall, perlweiß oder silber lackiert
Verbindung	3,5 mm Klinke (M) auf 2 × RCA (M), farbcodiert, rot/weiß
Anwendung	Anschluss mobiler Geräte an Verstärker, DAC usw.

Technical Specifications:

Conductor Material	OFC
Conductor Structure	2 × (19 × Ø 0.127 mm OFC)
Cross Section	2 × 0.2405 mm ² (24 AWG)
Insulation	FPE Ø 3.0 mm + PE Ø 1.8 mm
Protective Layer	AL foil
Shielding	Braid (128 × Ø 0.12 mm TC, tinned)
Outer Jacket	PVC Ø 6.0 mm, cotton braid (black)
Signal Quality	High-quality, low-noise transmission
Connector	3.5 mm jack to 2× RCA, gold-plated, metal sleeve, pearl white or silver coated
Connection	3.5 mm jack (M) to 2 × RCA (M), color-coded, red/white
Application	Connection of mobile devices to amplifier, DAC, etc.